


### SAE Flens 3000PSI type X3 (exclusief O-ring)




#### Modellen:

Bestelnummer	slangmaat	Flens	H	L	A	max. werkdruk bar*
C10X3-08	1/2	5/8	52	85	34	350
C12X3-08**	1/2	3/4	52	85	38,1	350
C10X3-10	5/8	5/8	52	88	34	350

\*\*uitlopend model


### SAE Flens 3000PSI uit een stuk type X3-ES (exclusief O-ring)



#### Modellen:

Bestelnummer	slangmaat	Flens	H	L	A	max. werkdruk bar*
C08X3-08 ES	1/2	1/2	47	80	30,2	350
C12X3-08 ES	1/2	3/4	47	80	38,1	350
C12X3-10 ES	5/8	3/4	48	84	34	350
C12X3-12 ES	3/4	3/4	54	94,5	38,1	350
C16X3-12 ES	3/4	1	54	94,5	44,5	350
C12X3-16 ES	1	3/4	55	106	38,1	280
C16X3-16 ES	1	1	55	106	44,5	280
C20X3-16 ES	1	1 1/4	55	106	50,8	280
C20X3-20 ES	1 1/4	1 1/4	62	120	50,8	210
C24X3-20 ES	1 1/4	1 1/2	62	120	60,3	210
C24X3-24 ES	1 1/2	1 1/2	67,5	132	60,3	185
C32X3-24 ES	1 1/2	2	67,5	132	71,4	185
C32X3-32 ES	2	2	70	140	71,4	175

### SAE 45° Flens 3000PSI type X345 (exclusief O-ring)

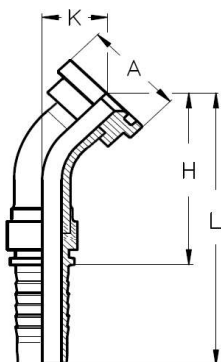

#### Modellen:

Bestelnummer	slangmaat	Flens	H	L	K	A	max. werkdruk bar*
C10X345-08	1/2	5/8	51	90	24	34	350
C12X345-08**	1/2	3/4	49	82	22	38,1	350
C10X345-10	5/8	5/8	73	110	29	34	350
C20X345-20**	1 1/4	1 1/4	72	137	30	50,8	210
C32X345-24**	1 1/2	2	106	173	42	71,4	185
C32X345-32**	2	2	108	180	42	71,4	175

\*\*uitlopend model

Voor SAE afdichtringen zie pagina 3M.30

\* Attentie: let ook op de maximale werkdruk van de slang.