


Haakse schotkoppeling (DIN 2353) type WSV

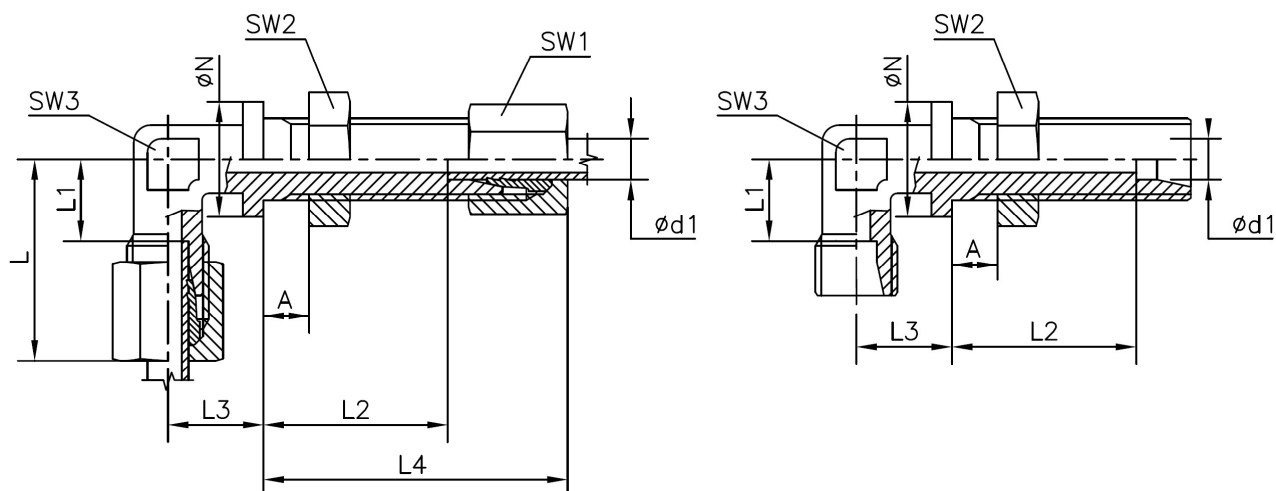

Modellen:

Bestelnummer	Ød1	werkdruk bar	L	L1	L2	L3	L4	ØN	SW1	SW2	SW3
modellen serie L											
WSV 6L	6L	315	27	12	27	14	42	17	14	17	12
WSV 8L	8L	315	29	14	27	17	42	19	17	19	12
WSV 8L-B	8L	315	-	14	27	17	-	19	-	19	12
WSV10L	10L	315	30	15	28	18	43	22	19	22	14
WSV10L-B	10L	315	-	15	28	18	-	22	-	22	14
WSV12L	12L	315	32	17	29	20	44	24	22	24	17
WSV12L-B	12L	315	-	17	29	20	-	24	-	24	17
WSV15L	15L	315	36	21	31	23	46	27	27	30	19
WSV15L-B	15L	315	-	21	31	23	-	27	-	30	19
WSV18L	18L	315	40	23,5	32,5	24	49	32	32	36	24
WSV22L	22L	160	44	27,5	34,5	30	51	36	36	41	27
WSV28L	28L	160	47	30,5	35,5	34	52	42	41	46	36
WSV35L	35L	160	56	34,5	36,5	39	58	50	50	55	41
WSV42L	42L	160	63	40	36	43	59	60	60	65	50
modellen serie S											
WSV 6S	6S	630	31	16	29	17	44	19	17	19	12
WSV 8S	8S	630	32	17	29	18	44	22	19	22	14
WSV10S	10S	630	34	17,5	29,5	20	46	24	22	24	17
WSV12S	12S	630	38	32,1	30,5	21	47	27	24	27	17
WSV14S	14S	630	40	22	32	23	50	27	27	30	19
WSV16S	16S	400	43	24,5	31,5	24	50	30	30	32	24
WSV16S-B	16S	400	-	24,5	31,5	24	-	30	-	32	24
WSV20S	20S	400	48	26,5	33,5	30	55	36	36	41	27
WSV20S-B	20S	400	-	26,5	33,5	30	-	36	-	41	27
WSV25S	25S	400	54	30	35	34	59	42	46	46	36
WSV30S	30S	400	62	35,5	37,5	39	64	50	50	50	41
WSV38S	38S	315	72	41	37	43	68	60	60	65	50